

# Gesture Pendant

KP1071 | 1.0

## GENERATION LIGHTING PENDANT

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


**SAVE THESE INSTRUCTIONS!**

**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**

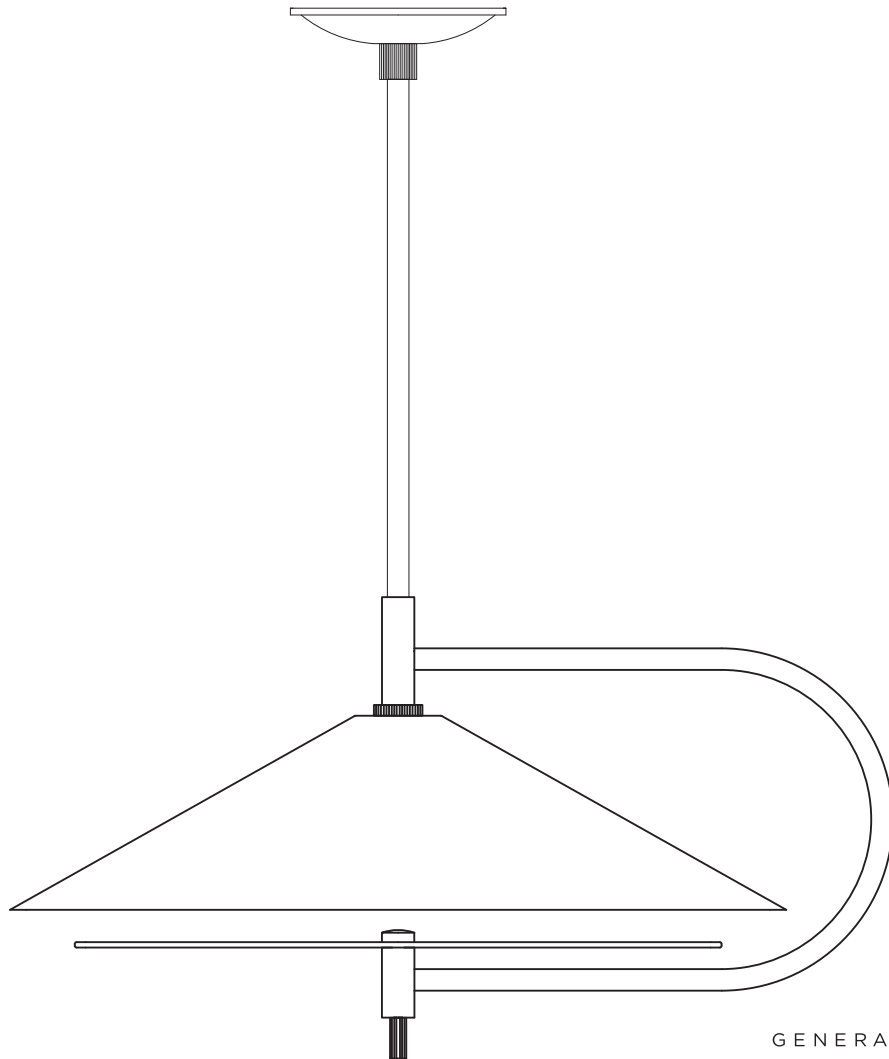

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

# Install the Fixture

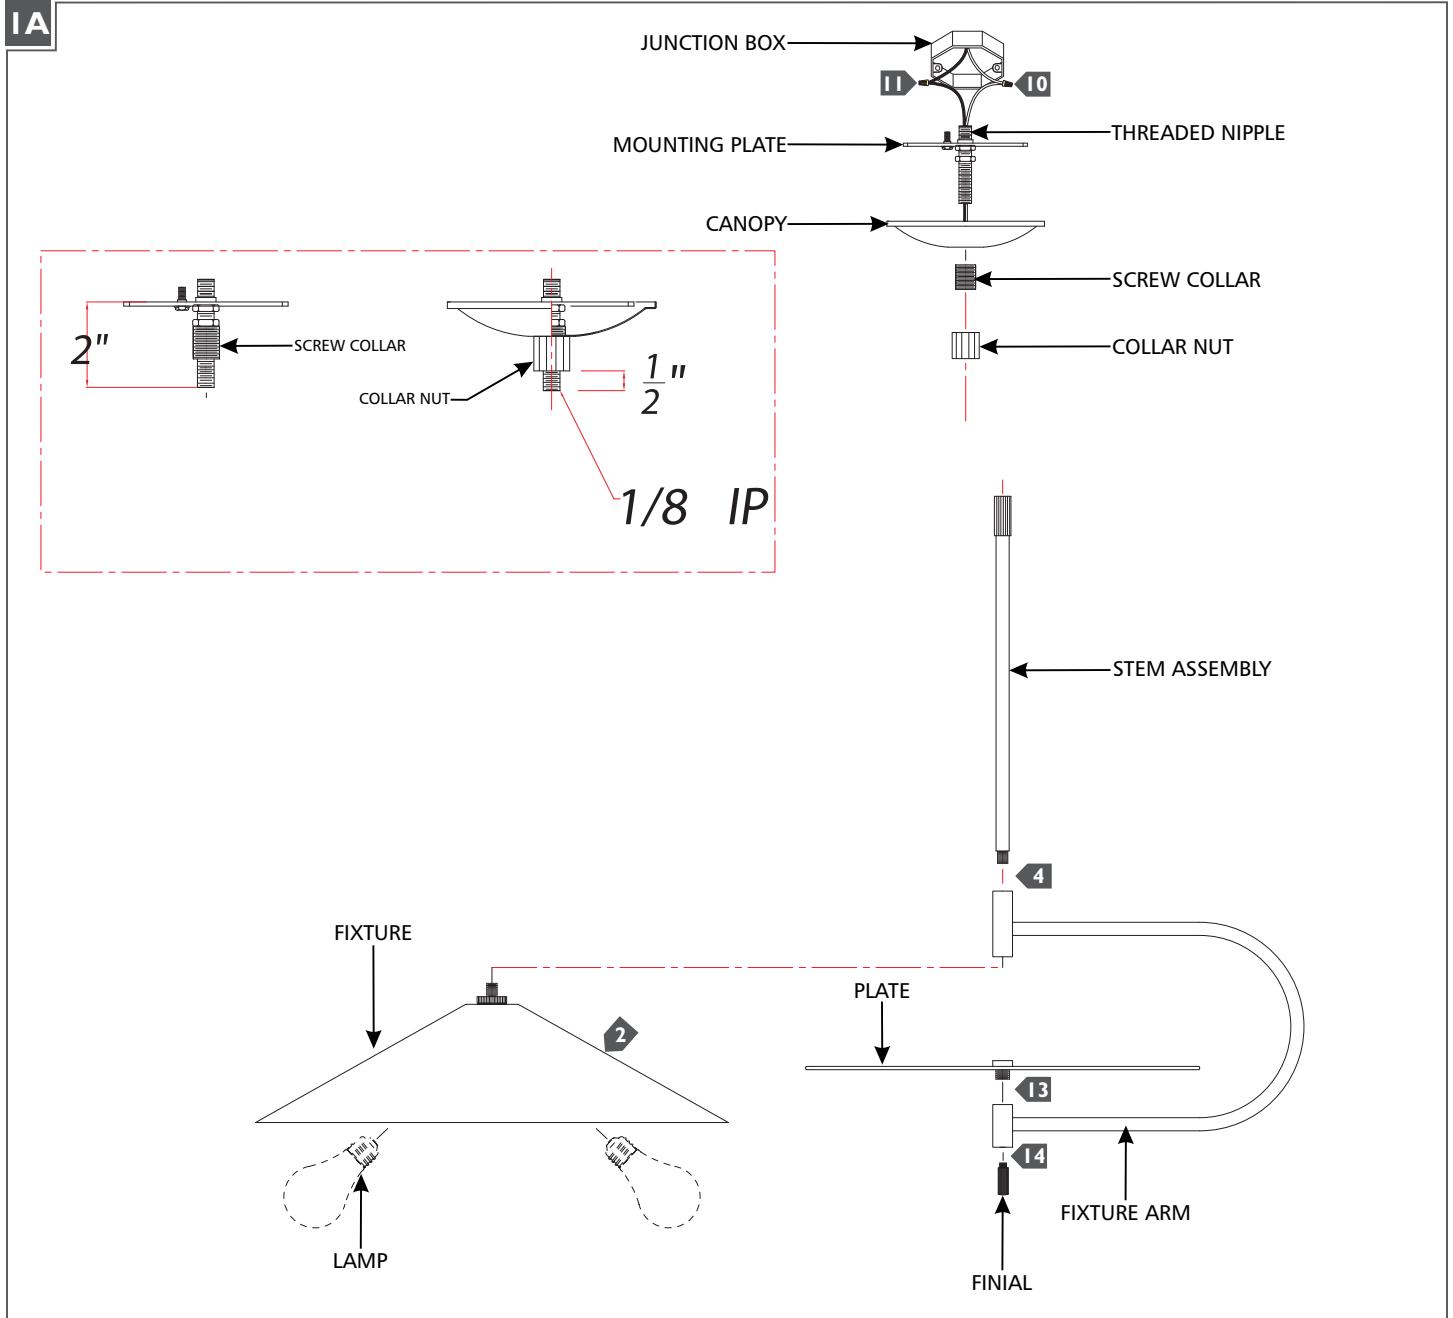

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate. Use the diagram to make sure threaded nipple has proper spacing for installation. Adjust as necessary.
- 2** Install the shade by feeding the fixture wires through the end of the fixture arm, then screw it onto the fixture arm as shown.
- 3** Screw the lamps into the socket. Refer to the label on the socket for Max Wattage Information.
- 4** Determine the wanted height or look of the fixture with the provided stems, feed the fixture wires through the stems, and assemble them by screwing them together, then screw the stem assembly onto the top of the fixture arm.
- 5** Unscrew the collar nut off the screw collar and place it onto the stem followed by the canopy.
- 6** Screw the screw collar onto the threaded nipple making sure to note proper spacing using the provided diagram.
- 7** Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem assembly.
- 8** Align and secure the mounting plate to the junction box.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 13** Screw the plate on the end of the fixture arm as shown.
- 14** Screw the finial to the bottom of the fixture arm as shown.