

Katie Pendant

LP1024, LP1031 1.0

GENERATION LIGHTING

Pendant

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com


© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

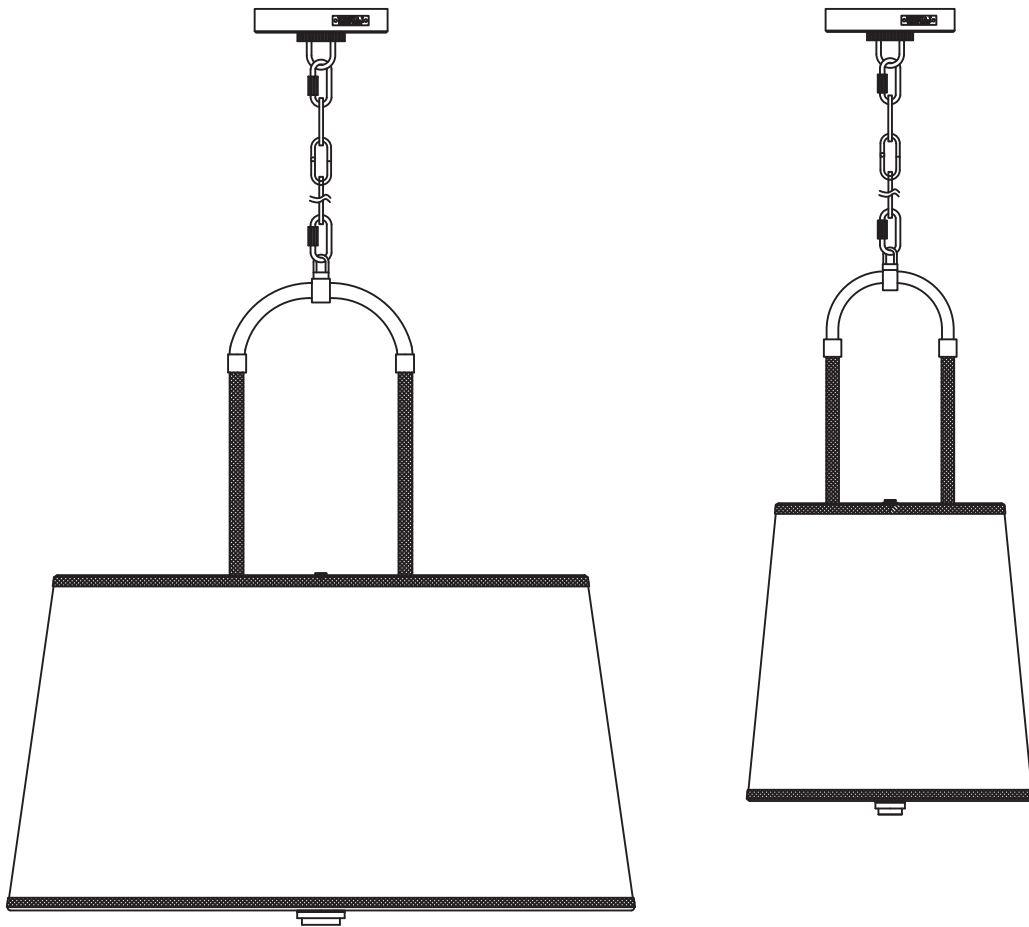

SAVE THESE INSTRUCTIONS!

Install the Fixture

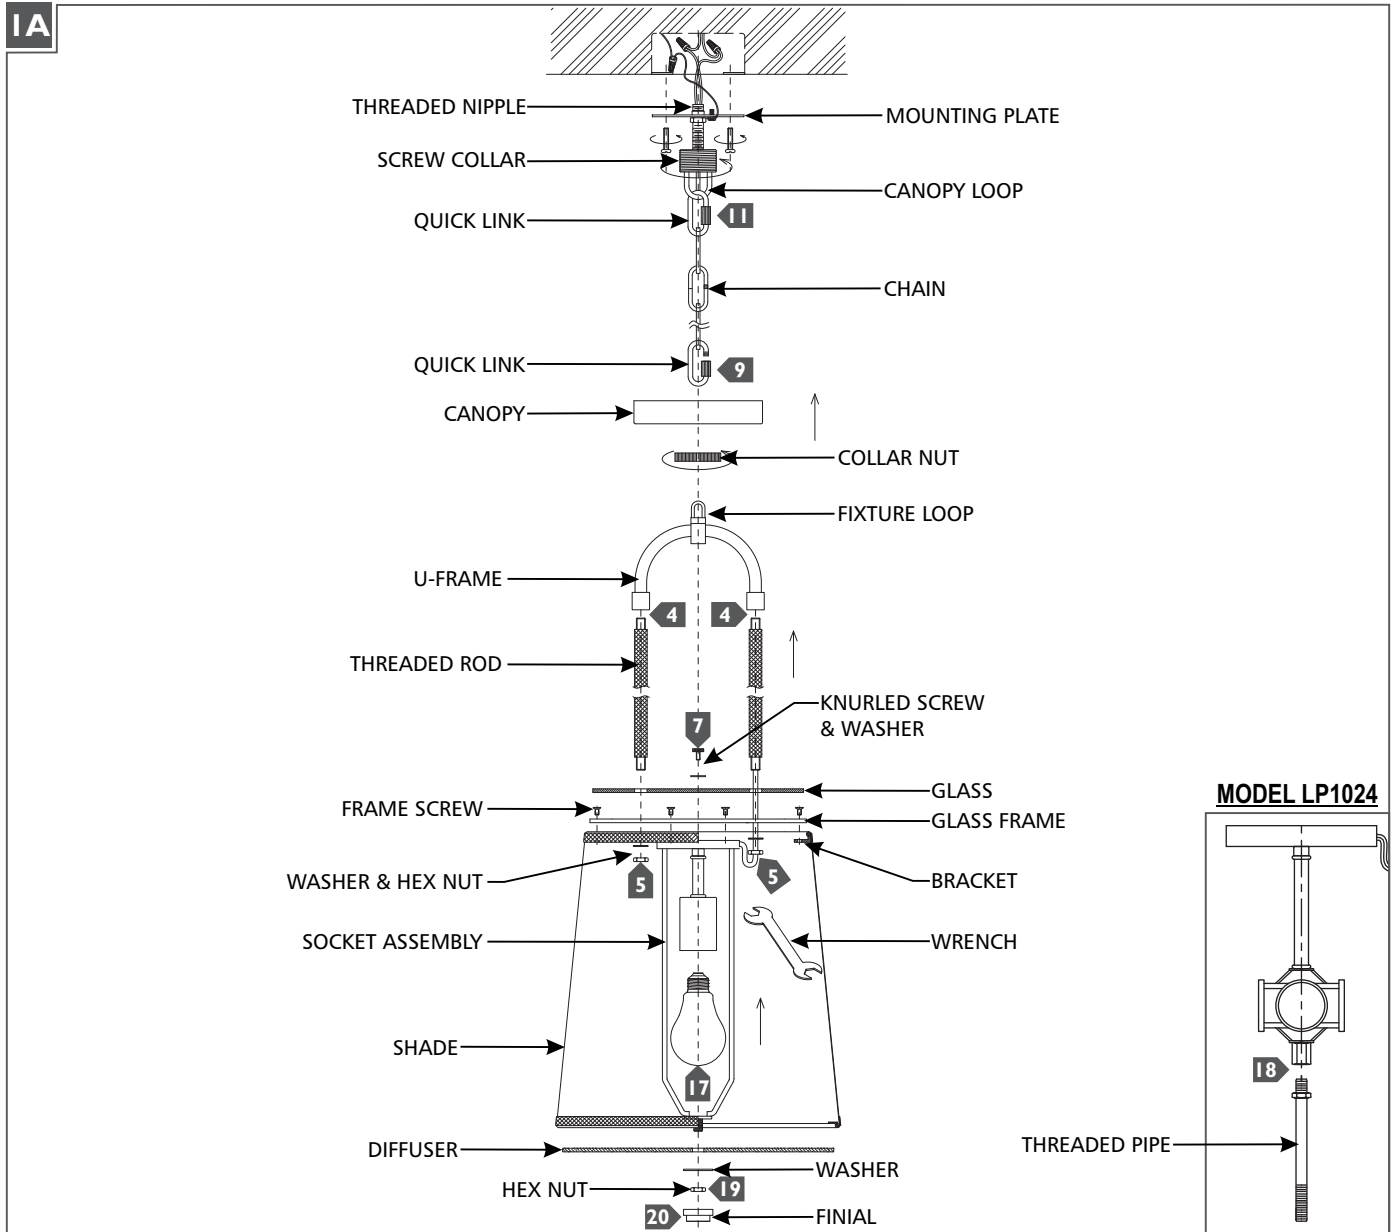

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate, then screw the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** If necessary, install the socket assembly to the glass frame using the frame screws.
- 4** Screw the threaded rods into the u-frame.
- 5** Secure the threaded rod and the socket assembly by screwing the washers and hex nuts onto the threaded rods using a wrench.
- 6** Install the shade to the glass frame using the frame screws.
- 7** Install the glass onto the glass frame using the washer and knurled screw.
- 8** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 9** Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 10** Unscrew the collar nut from the screw collar, then install the collar nut and the canopy onto the chain (in that order).
- 11** Install a quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 12** Weave the cord through the chain, collar nut, and canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 13** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 14** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 15** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 16** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 17** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage information.
- 18** **For Model LP1024 Only:** Screw the threaded pipe to the bottom of the socket assembly.
- 19** Place the diffuser and washer onto the socket assembly nipple/threaded pipe, then secure them in place by screwing on the hex nut.
- 20** Screw the finial onto the bottom of the socket assembly nipple.