

# Address Light (LED)

1.0

GENERATION LIGHTING

## SAVE THESE INSTRUCTIONS!

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

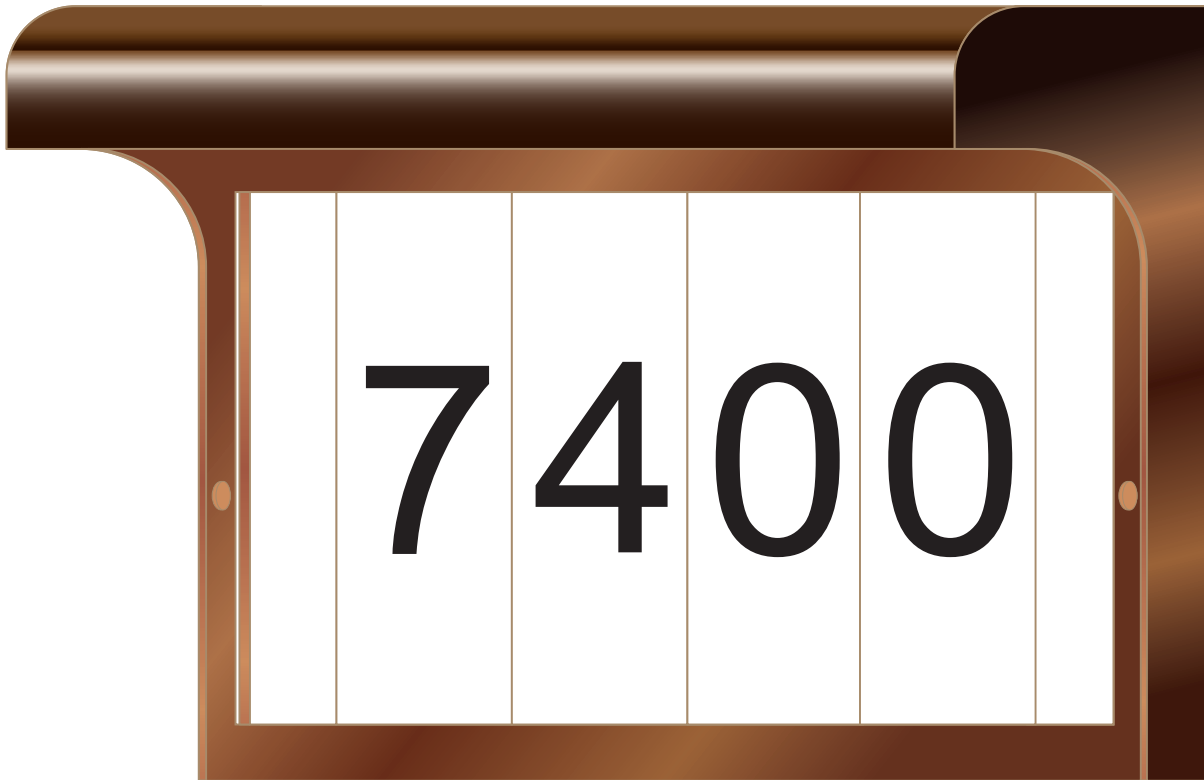


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077


T 847.410.4400 | F 847.410.4500

[www.generationlighting.com](http://www.generationlighting.com)


## Install the Fixture

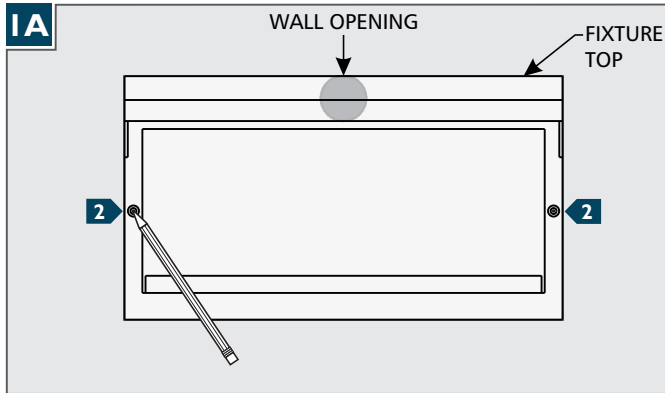


- 1** Place and level the fixture in the desired location.  
**Note:** Ensure that the wall opening is positioned behind the top of the fixture
- 2** Mark the two points through the mounting holes on the fixture.

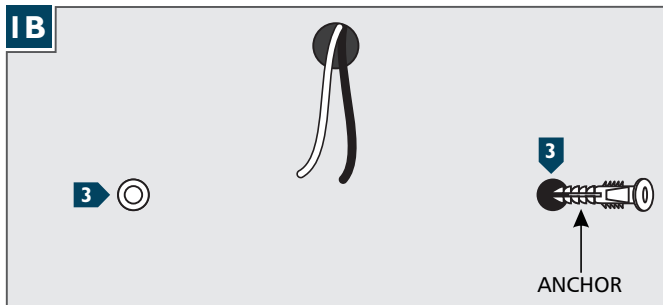


- 3** Drill appropriate size holes at the marked locations and install the anchors.

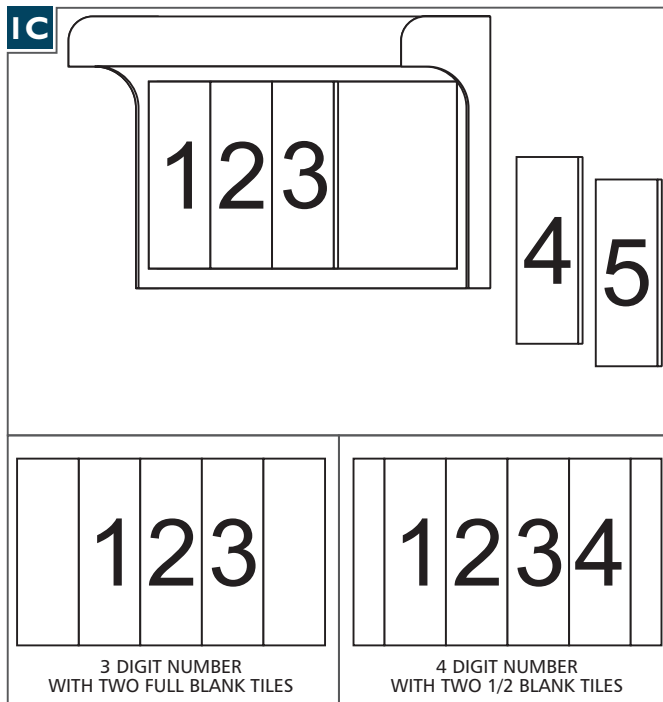


- 4** Place desired number tiles (not included) into back of fixture (fixture holds five digits). Use two full blank tiles (9619) for three digit number or two one half blank tiles (9621) for four digit number.

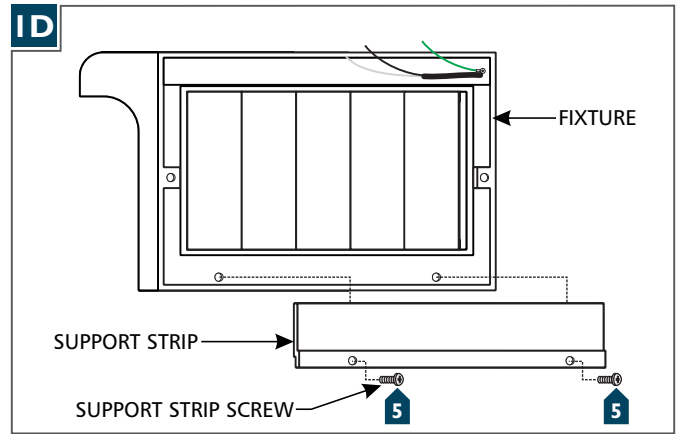

- 5** Attach tile support strip to the back of the fixture with two screws provided.

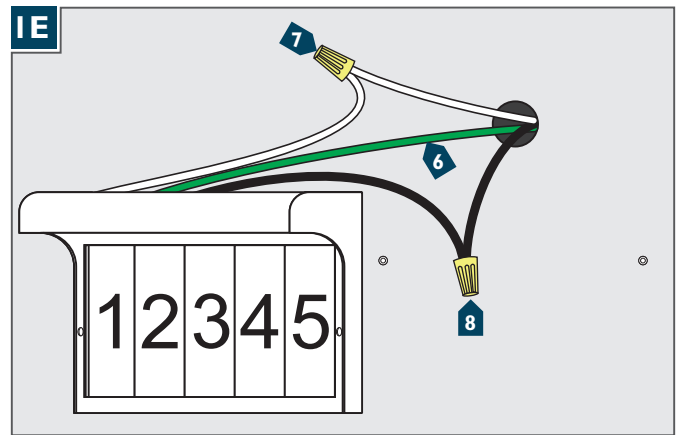

- 6** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire to the hot power line wire with a wire nut.

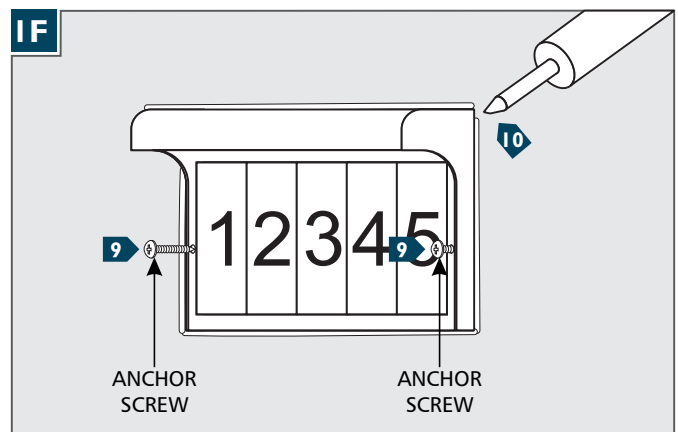

- 9** Properly place all wires and wire nut connections inside the top of the fixture and secure the fixture to the wall by screwing the anchor screws into the anchors.
- 10** For wet locations, caulk around the base of the fixture with waterproof construction sealant.