

Oslo Island

66160 I.I

GENERATION LIGHTING PENDANT

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.



This instruction shows a typical installation.

SAVE THESE INSTRUCTIONS!

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

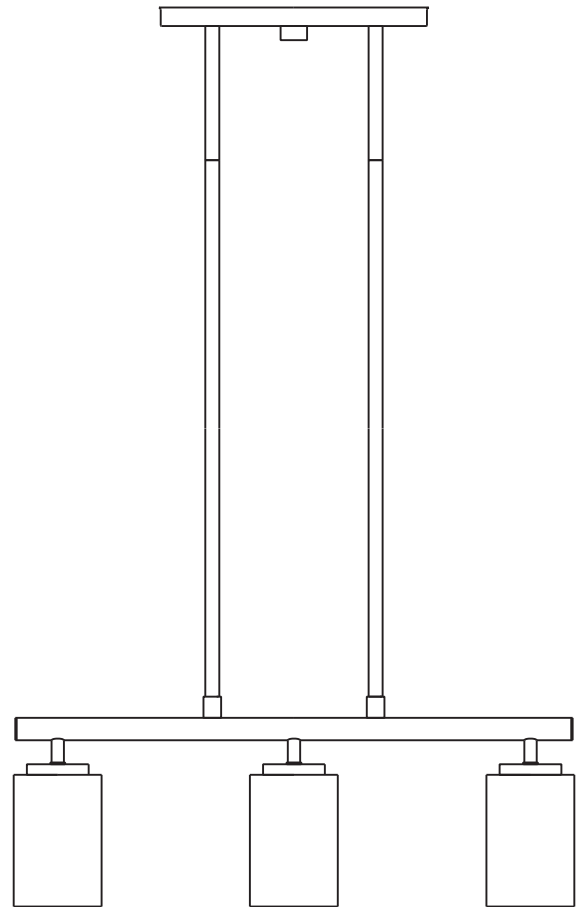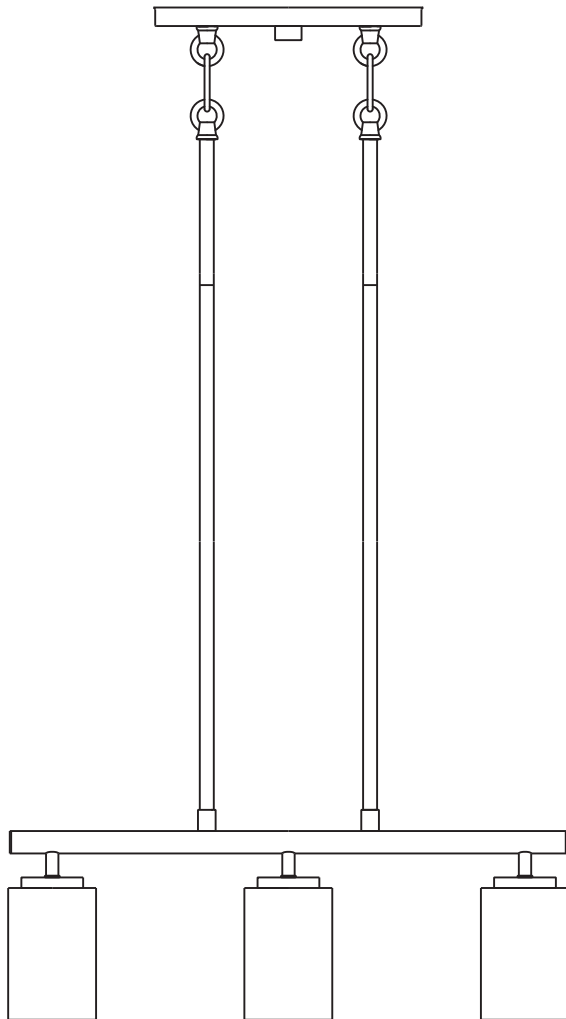

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

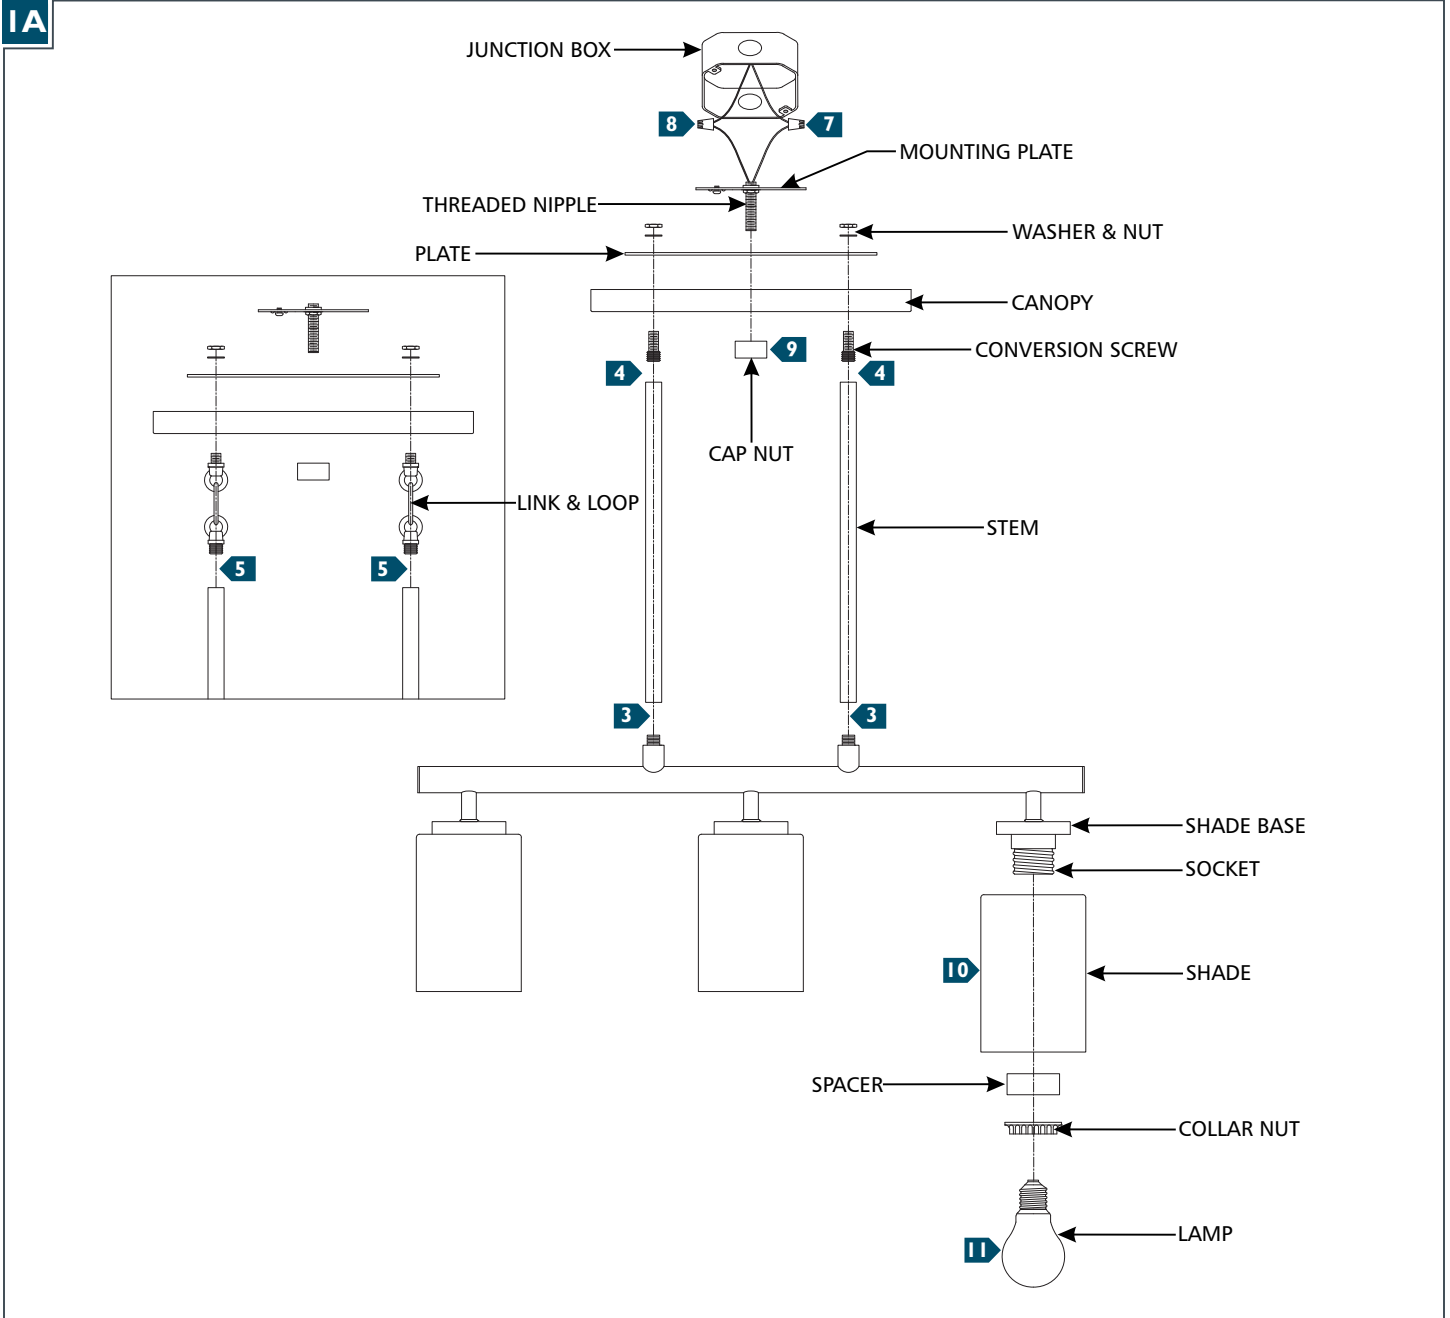

- 1** If necessary, screw the threaded nipple tightly onto the mounting plate.
- 2** Secure the mounting plate to the junction box.
- 3** Determine the wanted height or look of the fixture with the provided stems, feed the fixture wires through the stems and assemble them by screwing them together, then screw the stem assemblies onto the top of the fixture.
- 4** **For standard ceilings:** Feed the fixture wires through the conversion screws, canopy, plate, washers and nuts, then screw the conversion screws onto the stems and secure all parts together by tightening the hex nuts and washers onto the conversion screws.
- 5** **For sloped ceilings:** Feed the fixture wires through the links and loops, then screw the links and loops to the stems. Place the canopy and plate onto the links and loops and tighten the hex nuts and washers to secure in place.
- 6** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 9** Neatly place all the wires into the junction box, place the canopy onto the threaded nipple, and secure it in place by screwing the cap nut onto the threaded nipple.
- 10** Place the spacer and shade over the socket and onto the shade base, then secure in place by screwing the collar nut onto the socket. Repeat for remaining shades.
- 11** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.