

# Moffet Street Island

6634506, 6634507 | 1.5

## GENERATION LIGHTING PENDANTS

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

**SAVE THESE INSTRUCTIONS!**


**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**

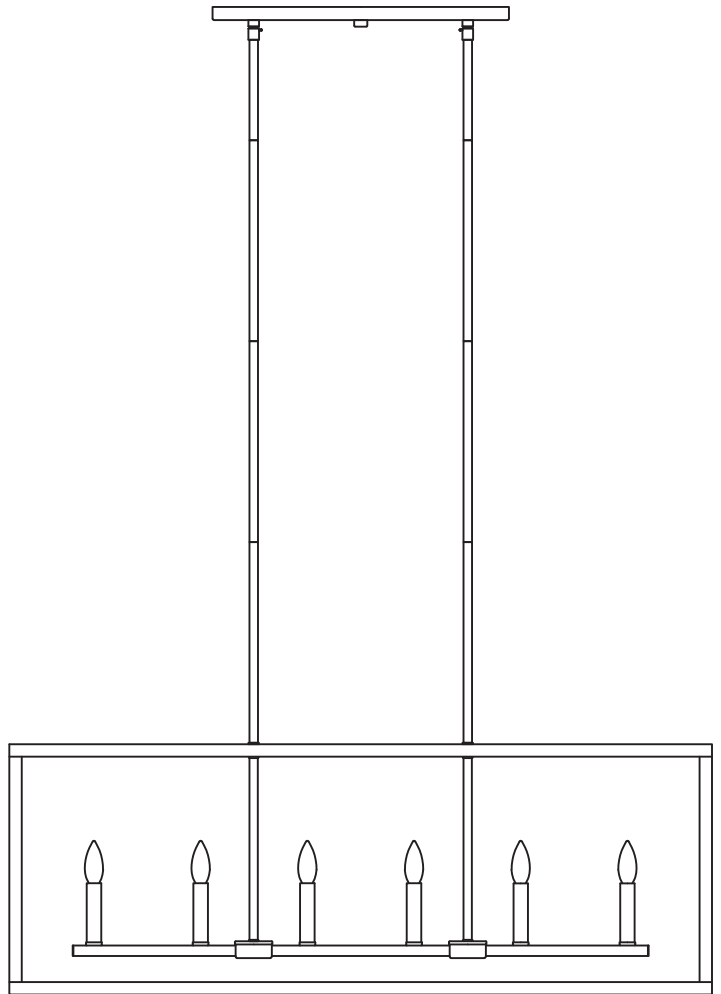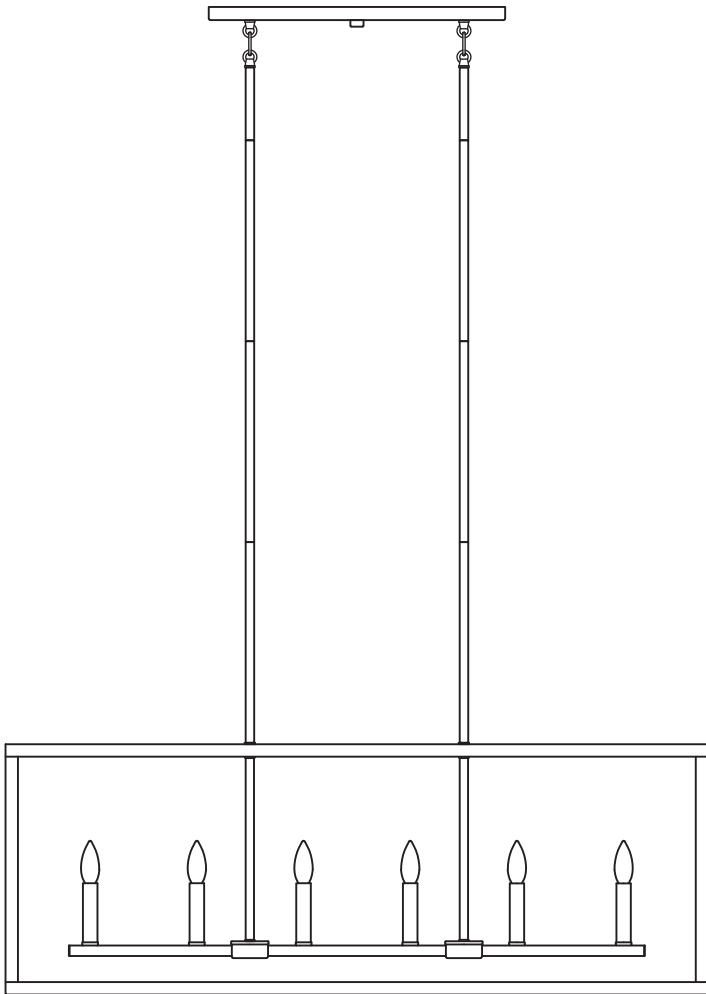

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

# Install the Fixture

IA

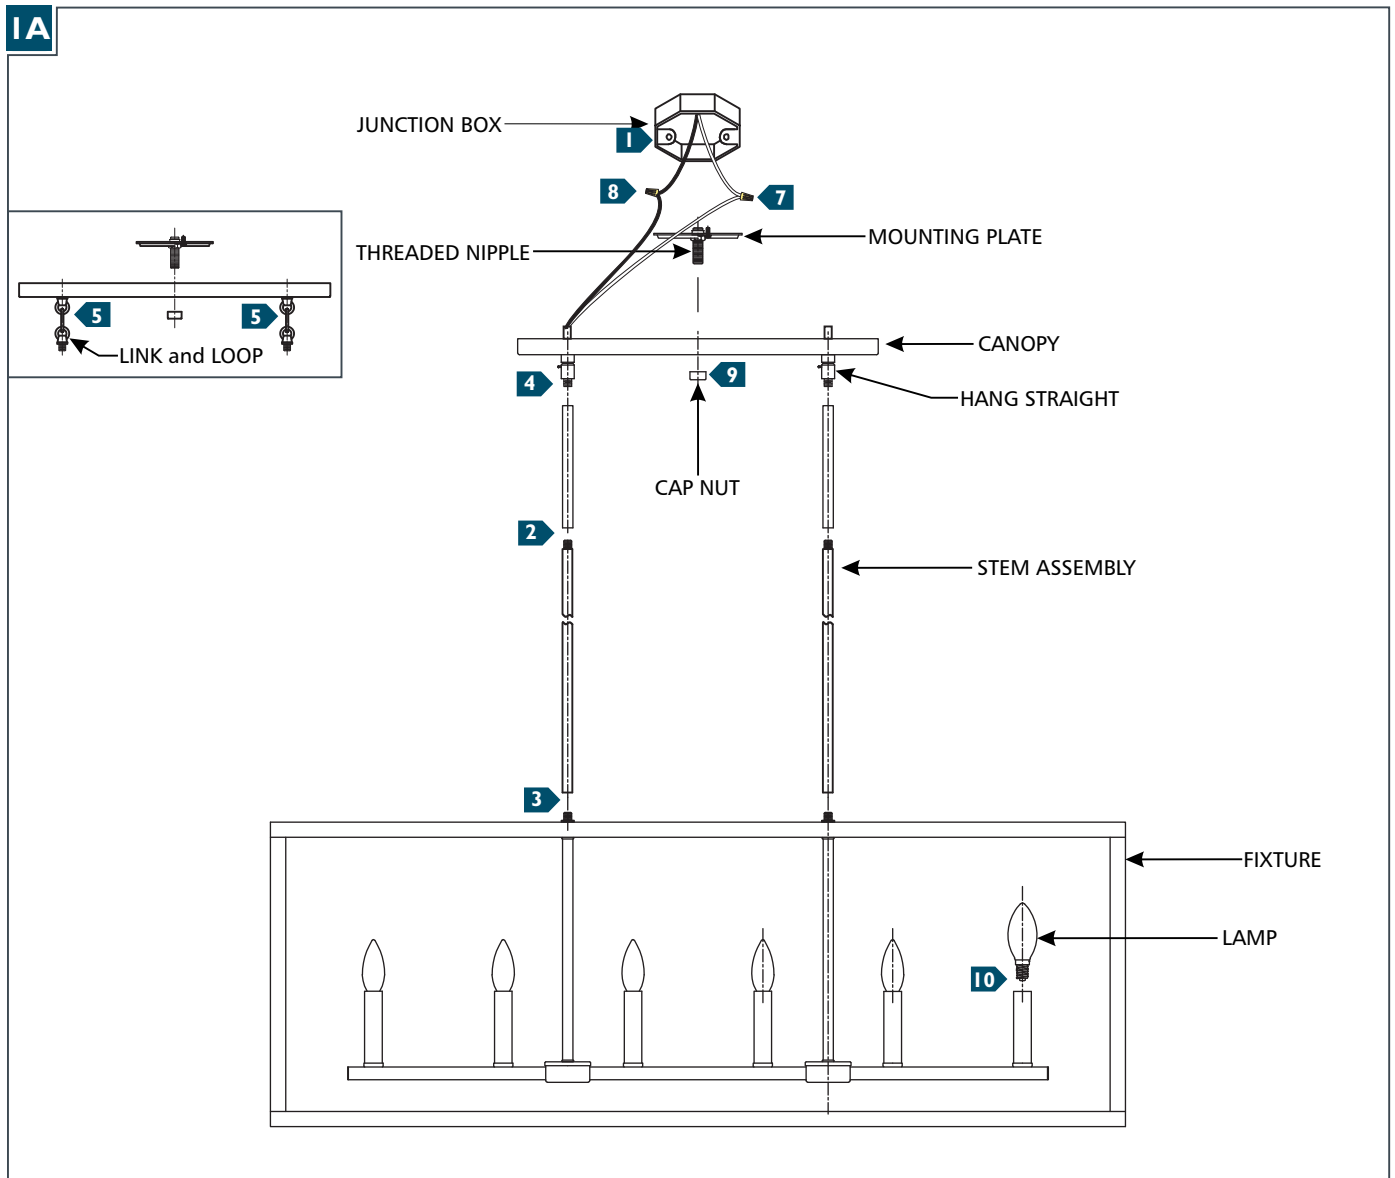

- 1** Secure the mounting plate to the junction box.
- 2** Determine the wanted height or look of the fixture with the provided stems and assemble them by screwing them together. All the parts may be used alone or used in combination.
- 3** Feed the fixture wires through the stems and screw the stem assembly to the top of the fixture.
- 4** **For standard ceilings:** Unscrew the hex nuts and washers and remove the hang straights from the canopy. Feed the fixture wires through the hang straight and canopy, then screw the hang straight to the stems. Place the canopy onto the hang straight, then tighten the hex nuts and washers to secure in place.
- 5** **For sloped ceilings:** Unscrew the hex nuts and washers and remove the hang straights from the canopy. Feed the fixture wires through the link and loop, then the canopy, then screw the link and loop to the stems. Place the canopy onto the links and loops and tighten the hex nuts and washers to secure in place.
- 6** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7** Connect the white fixture wires (square and/or rigid) from each side to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wires (round and/or smooth) from each side to the hot power line wire with a wire nut.
- 9** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the cap nut onto the threaded nipple.
- 10** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.