

Wilburn Outdoor Wall

8590901D, 8690901D, 8790901D, 8890901D | 1.0

GENERATION LIGHTING

WALL

CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.



GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.
 The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

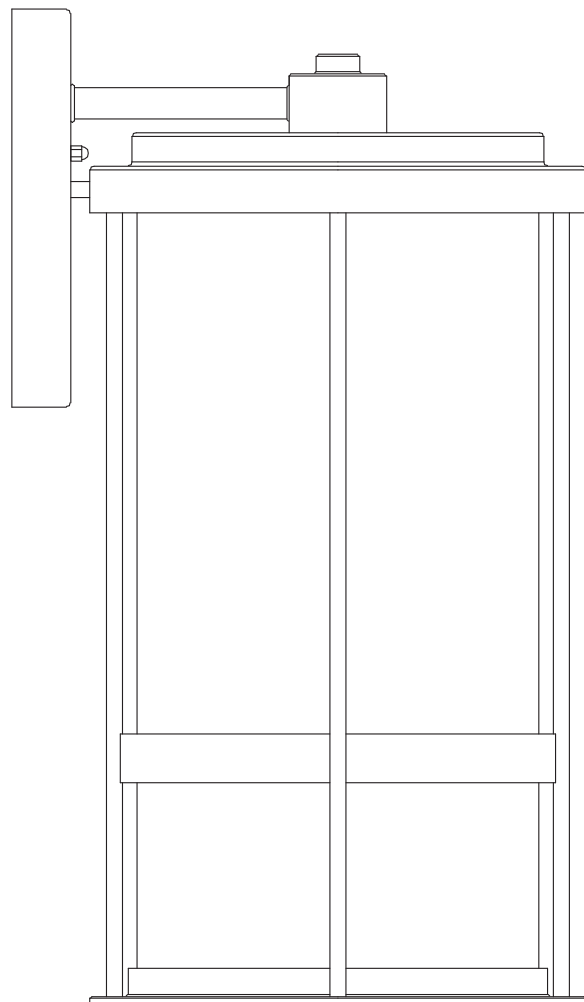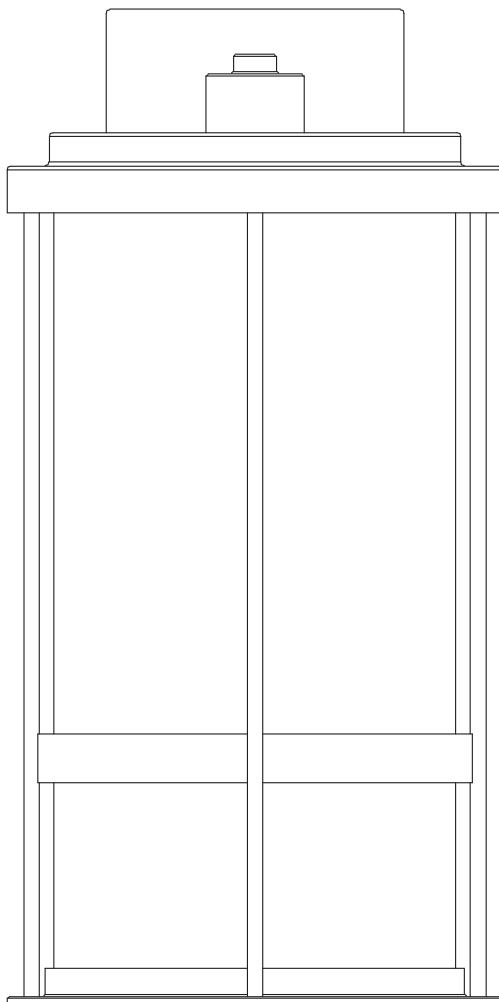

SAVE THESE INSTRUCTIONS!

Install the Fixture

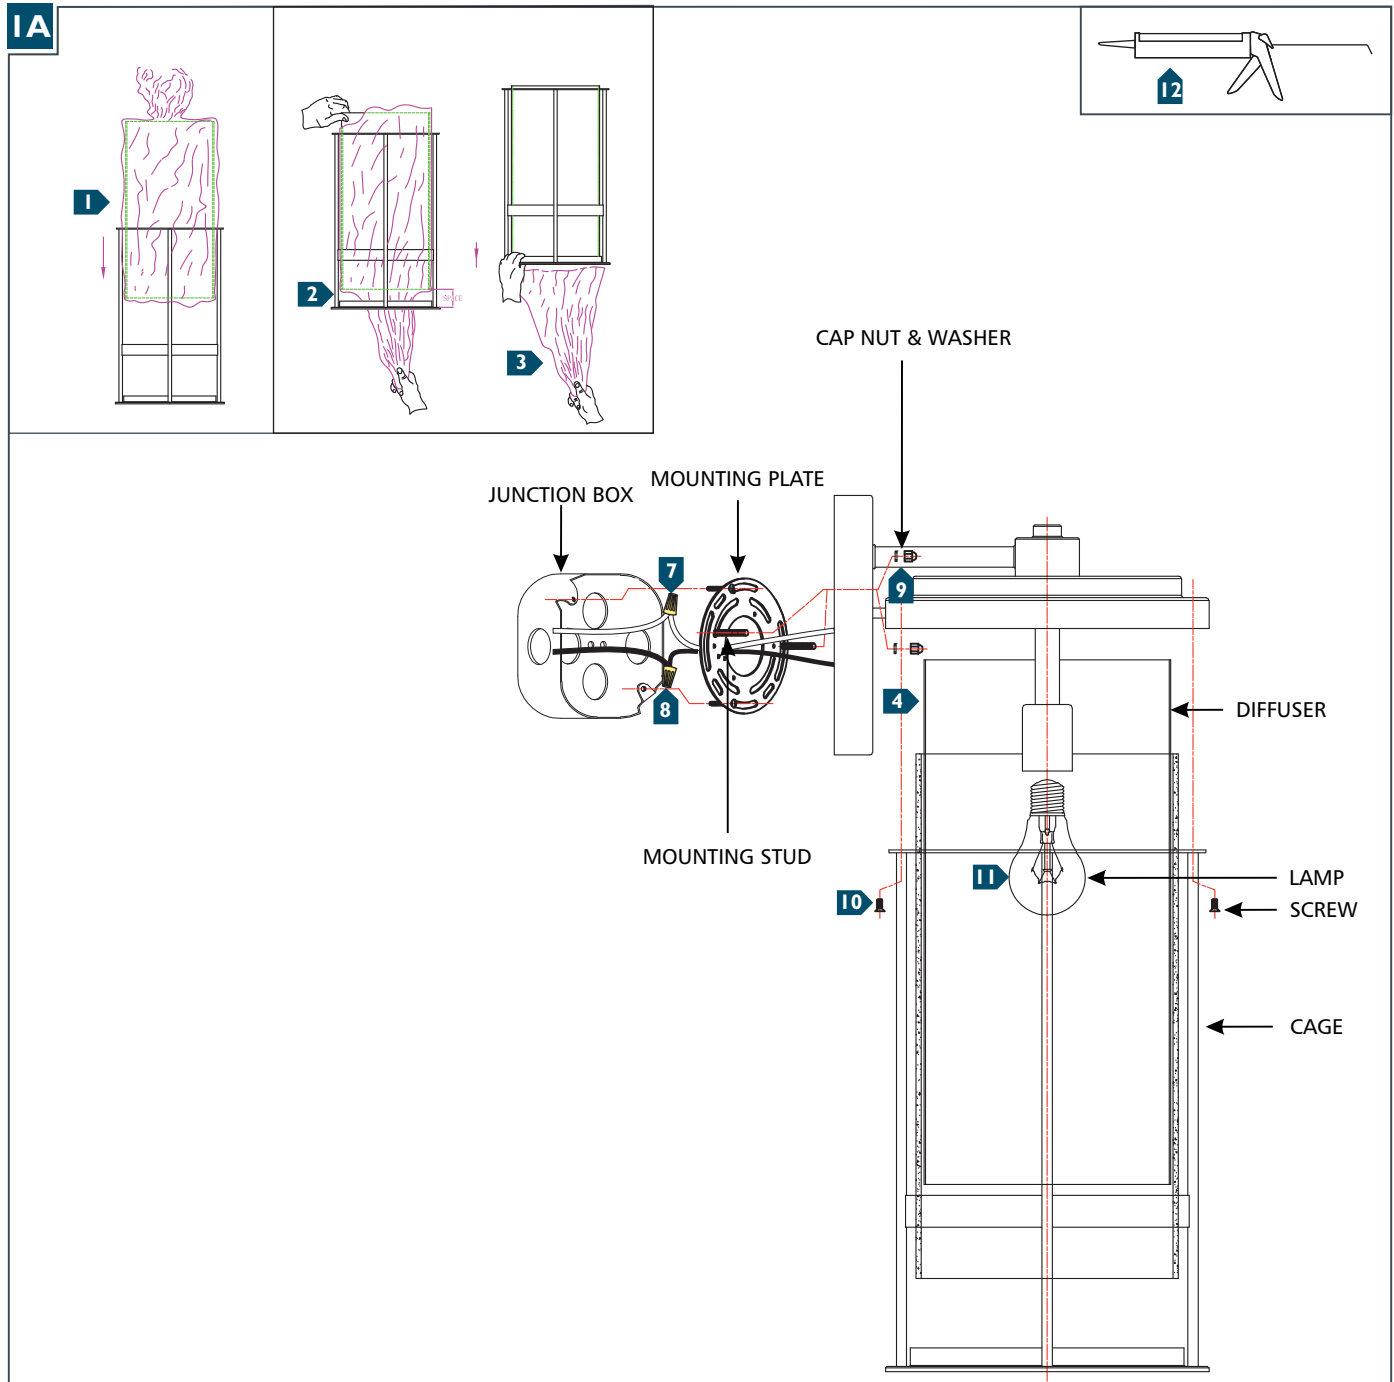

- 1** To prevent scratches, while still in the bag, insert the glass into the cage.
- 2** Leaving some space between the bottom of the glass and the cage, begin to remove the bag.
- 3** Completely remove the bag and gently place the glass completely into the cage.
- 4** Gently insert the diffuser into the glass.
- 5** Secure the mounting plate to the junction box.
- 6** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the fixture base onto the mounting studs, and secure it in place by screwing the cap nuts and washers onto the studs.
- 9**
- 10** Lift the cage and glass to the fixture and secure with the provided screws.
- 11** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 12** For Wet Locations, caulk around the base of the fixture with waterproof construction sealant.