

Summer 5 Light Chandelier

3175905 | I.1

GENERATION LIGHTING CHANDELIER

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

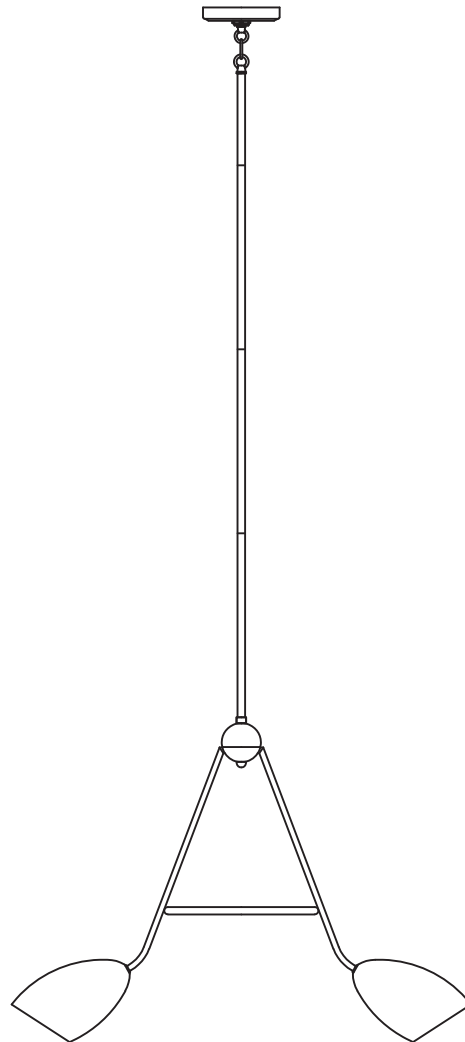

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

1A

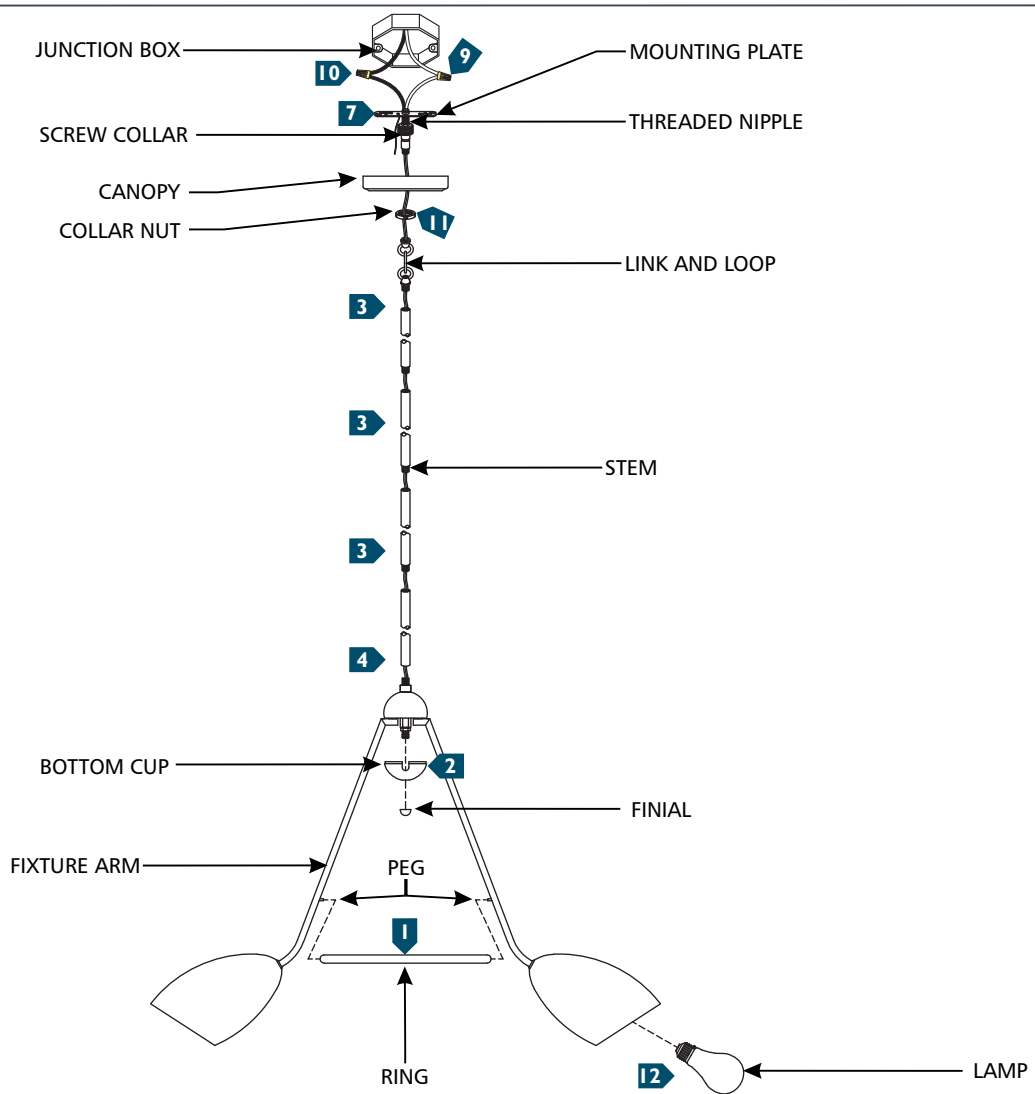

- 1** Place the ring on to the pegs on the inside of each fixture arm. Be careful not to pinch the fixture wires.
- 2** Place the bottom cup on to the fixture and secure with the finial.
- 3** Determine the wanted height or look of the fixture with the provided stems and/or link and loop and assemble them by screwing them together. All the parts may be used alone or used in combination.
- 4** Feed the fixture wires through the stems/chain and screw the assembly to the socket assembly.
- 5** Unscrew the collar nut from the screw collar and place it onto the stem/chain followed by the canopy.
- 6** Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
- 7** Align and secure the mounting plate to the junction box.
- 8** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 9** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 10** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 11** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 12** Screw the lamp into the socket. Refer to the label in the socket for Max Wattage Information.