

Seville Wall

4120201, 4420202, 4420203, 4420204, 4420205 | 1.1

GENERATION LIGHTING WALL

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

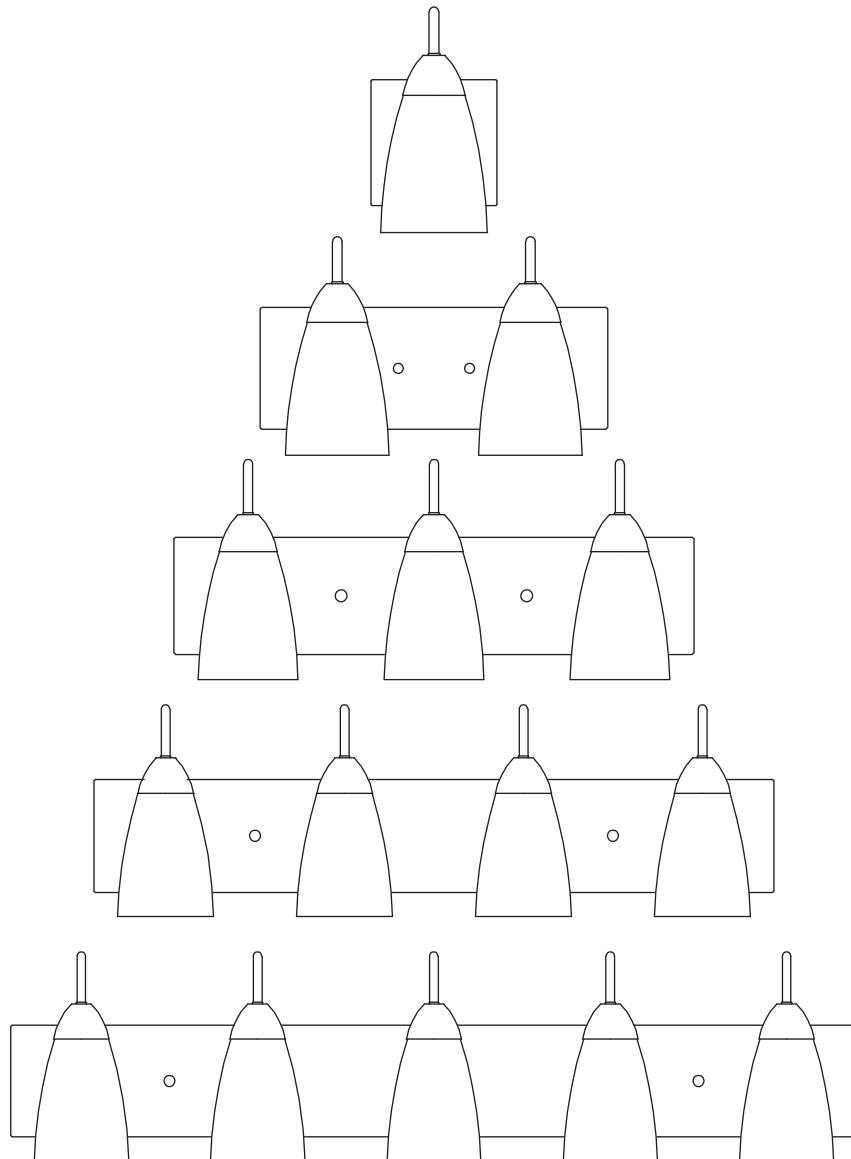


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

www.generationlighting.com

Install the Fixture

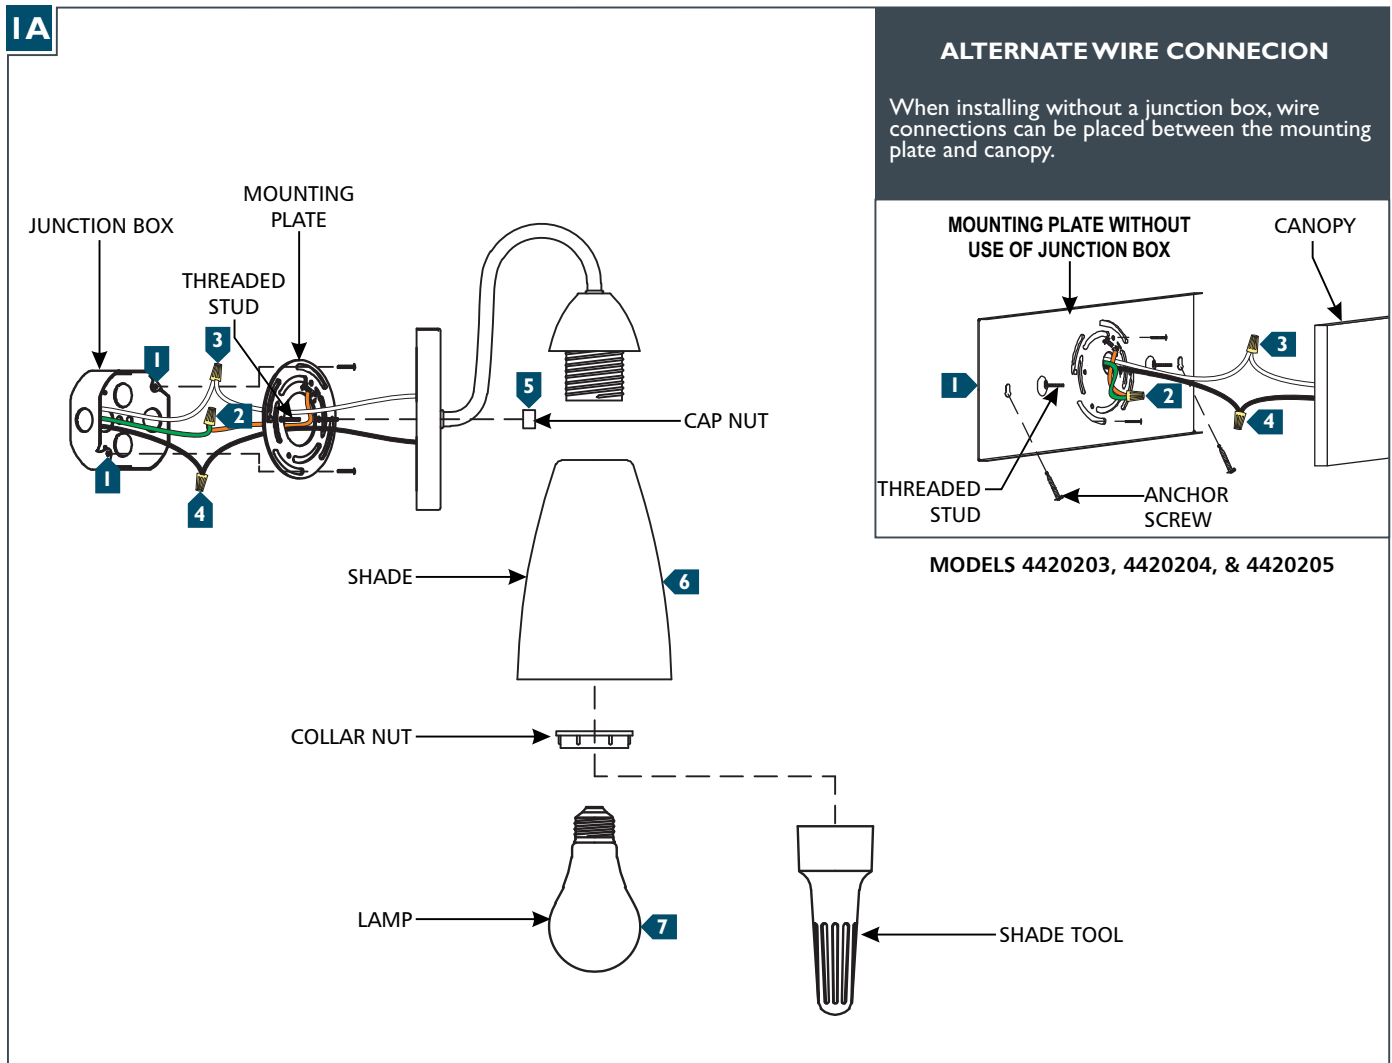

- 1** Secure the mounting plate to the junction box or wall. If applicable, properly anchor the mounting plate.
- 2** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Neatly place the wires into the junction box, mount the fixture base onto the threaded stud(s), and secure it with the cap nut(s).
- 6** Install the shade by placing it onto the socket and secure in place by screwing the collar nut onto the socket using the shade tool. Repeat for remaining shades.
- 7** Screw the lamp(s) into the socket(s). Refer to the label on the socket for Max Wattage Information.